

Specification

Model Number	Depth-Inches	Drain Placement
PS1714ADA	5-1/4"	Upper Central



SINK DESCRIPTION

Under Counter Mounting sink

Glazing technology holds the advantage of the easy-cleaning
Acid and alkali resistant with bright clean surface.

High-temperature firing makes ceramic body tight and
Lower water absorption.

Without glaze needs space after, it will be more solid after fixed.

There is a overflow hole on it to prevent water from spilling
over the sink.

CUTOUT DIMENSTIONS

Template included, template number PS1714ADA

PRODUCT COMPLIANCE

All product certified by IAPMO to meet standards ASME
A112.19.2-2018/CSA B45.1-18

WARRANTY

Limited lifetime warranty against material or manufacturing
defects to the original consumer purchaser




TECHNICAL SPECIFICATION

Installation	Under-mount
Bowl area	Length: 19-1/4"(Outside) 17-1/4"(Inside) Width: 16" (Outside) 14-3/8"(Inside) Bowl Depth: 5-1/4"
Drain Hole	1-1/4" OD
Template	Required, Included

Note:

Install this product according to the installation instruction
Minimum base cabinet size 21"
Consult an installer for confirmation.

Installation Detail

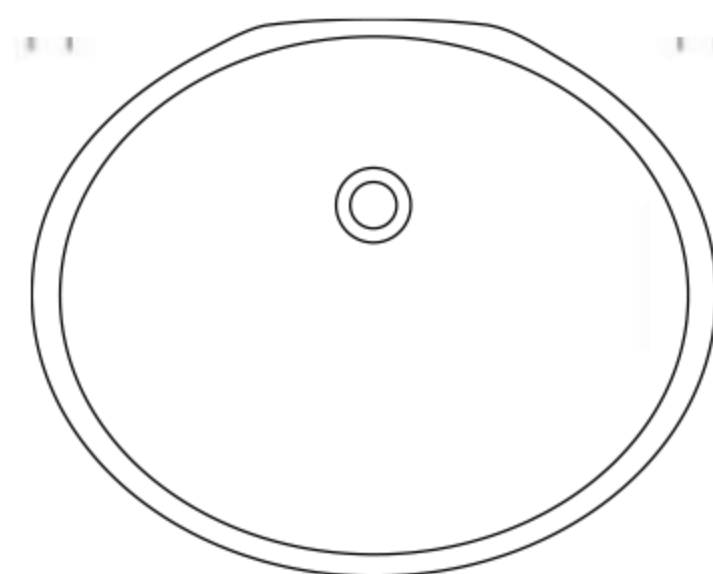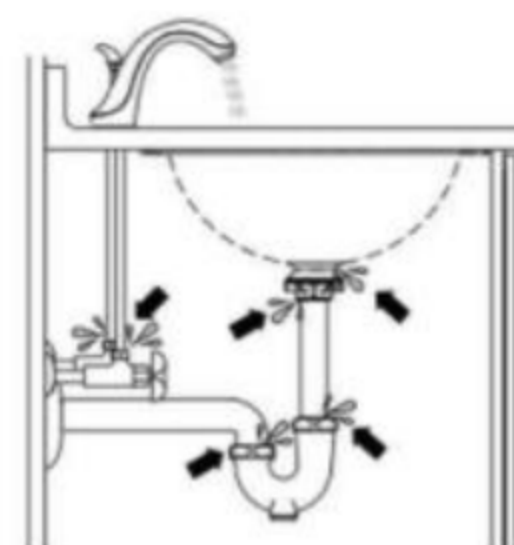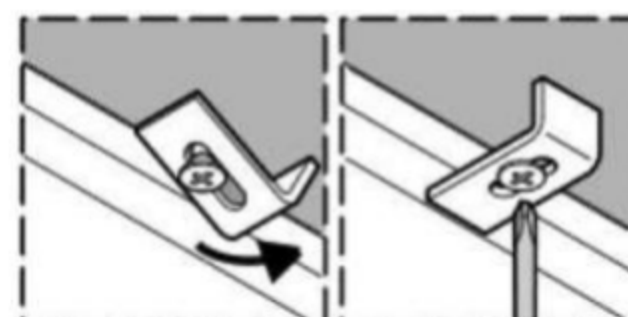

CRITICAL DIMENSIONS

(DO NOT SCALE)

