

Model Number	Bowl Depth (min-max)	Drain Placement
BR-206W	6-1/2"–8-3/8"	Central



SINK DESCRIPTION

Under Counter Mounting sink

Glazing technology holds the advantage of the easy-cleaning. Acid and alkali resistant with bright clean surface.

High-temperature firing makes ceramic body tight and lower water absorption.

Without glaze needs space after, it will be more solid after fixed.

There is an overflow hole on it to prevent water from spilling over the sink.

CUTOUT DIMENSTIONS

Template included, template number BR-206W

PRODUCT COMPLIANCE

All product certified by IAPMO to meet standards ASME A112.19.2-2018/CSA B45.1-18

WARRANTY

Limited lifetime warranty against material or manufacturing defects to the original consumer purchaser

TECHNICAL SPECIFICATION

Installation	Under-mount
Bowl area	Length: 20-7/8" (Outside) / 18-11/16" (Inside) Width: 14-3/4" (Outside) / 12-5/8" (Inside)
Minimum Bowl Depth	6-1/2" (measured rim to bowl floor)
Nominal Bowl Depth	7" (measured at center, rim to basin)
Maximum Installed Depth	8-3/8" (counter to drain outlet)
Drain Hole	1-1/4" OD
Template	Required, Included




Note:

Install this product according to the installation instruction.

Minimum base cabinet size 21".

Consult an installer for confirmation.

Installation Detail

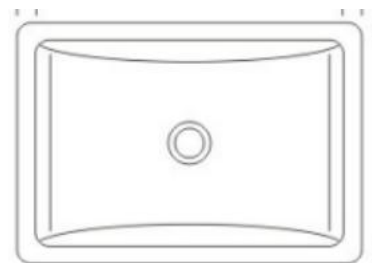

CRITICAL DIMENSIONS

(DO NOT SCALE)

